

C Series
Single Channel
Frequency Isolated Safety Barrier

→ **Introductions**

This isolated safety barrier converts the frequency signals from a hazardous area into current or voltage signals to a safe area. DIN rail power supply function can be selected in ordering.

The input, output, and power supply are galvanically isolated from each other. You can use handheld programmer to modify parameters or to calibrate the apparatus.

→ **Parameters**

Explosive-proof grade: [Ex ia Ga] IIC

Power supply:

Connection type: Terminals (9+, 10-) or DIN rail connector

Rated voltage: 18 V DC ~ 60 V DC (Recommended voltage: 24 V DC)

Input (1, 2):


Input signal: frequency

Switching point:

Low level: $\phi \sim 2$ V; High level: 4 ~ 30 V (The other triggerpoint need to be ordered)

owed Ncy

Single input, single output

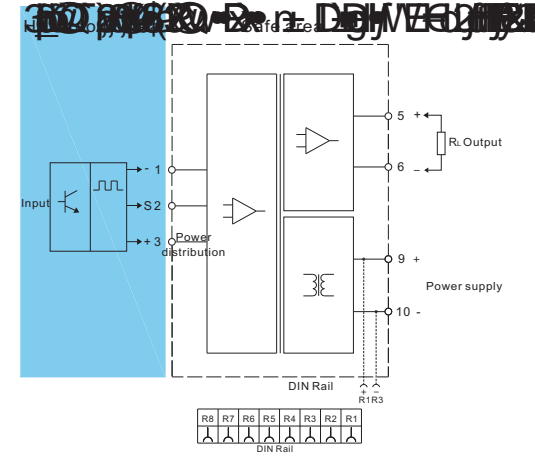

Nanjing New Power Electric Co., Ltd.

installation and displacement.

- The devices were designed for use in pollution degree 2 and overvoltage category III as per IEC/EN 60664-1. If used in areas with higher pollution degree, the devices need to be protected accordingly.
- Installation position shall not be affected by strong mechanical vibration; impact and electromagnetic induction from signal terminal and power supply, should conform with the requirements on electromagnetic interference resistance of products in Class 3 industrial field atmosphere stipulated in IEC 61000-4; the atmosphere shall be free from gases that are corrosive to metal and plastic components.
- The apparatus must be installed, connected and adjusted by qualified personnel in non-hazardous area according with the instruction manual.
- The operator must strictly comply with the relevant local safety standards and guidelines.

→ **Supplementary instructions**

- Our company reserves the right to change the product information without prior notification to the user. If the contents of the description are different from website or sample, this description shall prevail.

