




## Wiring diagram

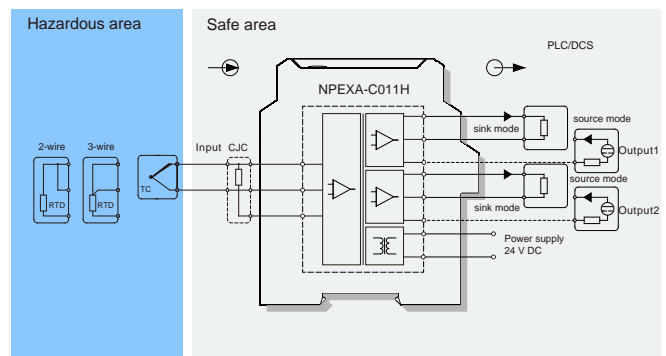

## Explosive-proof parameters

China National Quality Supervision and Test Centre for Explosion Protected Electrical Products (CQST)

Ex marking: [Ex ia Ga] C

Um: 250V

Certified parameters (Terminals 1, 2, 3):

Uo=8.7V, Io=33mA, Po=72mW

Co=3.58μF, Lo=21mH

## Model rules

NPEXA-C0   H

PB: BUS powered

Default: Terminals powered

The second output signal<sup>note1</sup>

Default: null

The first output signal<sup>note1</sup>

note1: output signal

Number	Output signal
1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA