

→ 简介
K

K



- 1002
-
-
-
-

→ 技术参数

24V AC/DC
0.85~1.1
50Hz~60Hz
≤2.2 W/24V DC ≤5.4 VA/24V AC

≤50mA/24V DC

≤15Ω

2~20kΩ

3NO+1NC 2NO+2NC

AgSnO₂+0.2μmAu

AC-15 5A/230V DC-13 5A/24V
10A gL/gG(NO) 6A gL/gG(NC)

数

≤100ms

≤30ms ≤100ms

≤30ms ≤100ms
20ms

境 数


IEC/EN 60947 IEC 61326-3-1

IEC/EN 61000-6-2 IEC/EN 61000-6-4

250V AC


6000V (1.2/50μs)

产品型号	输入设备	复位方式	触点数量
NPFSR-K4F31AMD		/	3NO+1NC
NPFSR-K4F31MD			3NO+1NC
NPFSR-K4F22AMD		/	2NO+2NC
NPFSR-K4F22MD			2NO+2NC
NPFSR-K4C31AD		/ /	3NO+1NC
NPFSR-K4C22AD		/ /	2NO+2NC

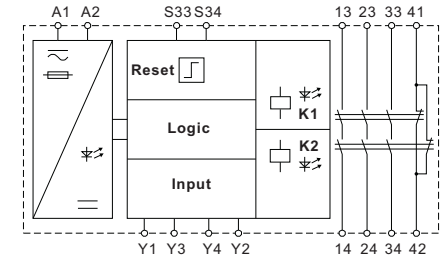


NPFSR-K4F31AMD

NPFSR-K4F22AMD

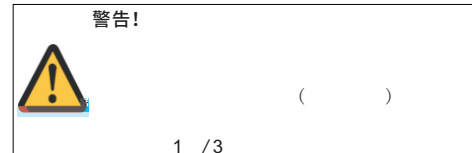

Nanjing New Power Electric Co., Ltd.



24V

DA1

NPF3R-K4F31(22)(A)MD

NPF3R-K4C31(22)AD

A1

A2

BS+

BSP

